



ROAD CLOSURE NOTICE

As part of the final stages of the Nickel Plate Trail pedestrian bridge project, a full closure of 96th Street at the Nickel Plate Trail crossing (between Hague Road and Masters Road) will be in place from 9 p.m. Friday, November 7 through Sunday, November 16, weather dependent.

Closure Details

- Location: All lanes of 96th Street at the Nickel Plate Trail crossing (between Hague Rd. and Masters Rd.) See map for specific locations.
- Dates: Beginning at 9 p.m. on Friday, November 7 through November 16
- Work Hours: 9 a.m. – 6 p.m. Monday through Saturday, weather dependent
 - For safety, the road will remain fully closed at all times throughout the duration of the project, including evenings and weekends when crews are not present.

Access Information

- 96th & Crosspoint Commons/Uptown Drive Area: Access to all businesses will remain open.
- 96th & Masters Road intersection:
 - **No through access will be permitted on 96th Street between Hague Rd. and Masters Rd. Motorists will be directed to detour route.**
 - Traffic will be reduced to one lane with right, left, and through movements permitted.
 - A soft closure will be in place to allow 96th St. access to all Indianapolis Pavilions businesses.
 - Staged barricades will direct vehicles safely into business entrances.

Work Scope

During this closure, the contractor will complete several major construction activities, including:

- Removal of existing train tracks across all lanes of 96th Street (varying in depth up to 19")
- Removal and replacement of concrete panels on eastbound (EB) and westbound (WB) lanes
- Removal and reconstruction of concrete curbs on EB and WB sides
- Reconstruction of 96th Street under the new bridge
- Reconstruction of concrete panels on eastbound 96th Street just east of the bridge
- Milling and resurfacing of 96th Street west of the bridge for both EB and WB lanes
- Striping of EB and WB lanes


What to Expect

Crews will be removing old materials and rebuilding the roadway to tie into the new bridge structure. This marks one of the final stages of the Nickel Plate Trail Bridge construction.


We appreciate the community's patience as this important work is completed. This work marks one of the final steps toward opening the Nickel Plate Bridge over 96th Street. We're thrilled to be nearing this milestone, with the bridge expected to open in December, weather dependent.

Please see the back of this flyer for a detour route and access map.

FOR MORE INFO VISIT: [FISHERSIN.GOV/DRIVEFISHERS](https://fishersin.gov/drivefishers)

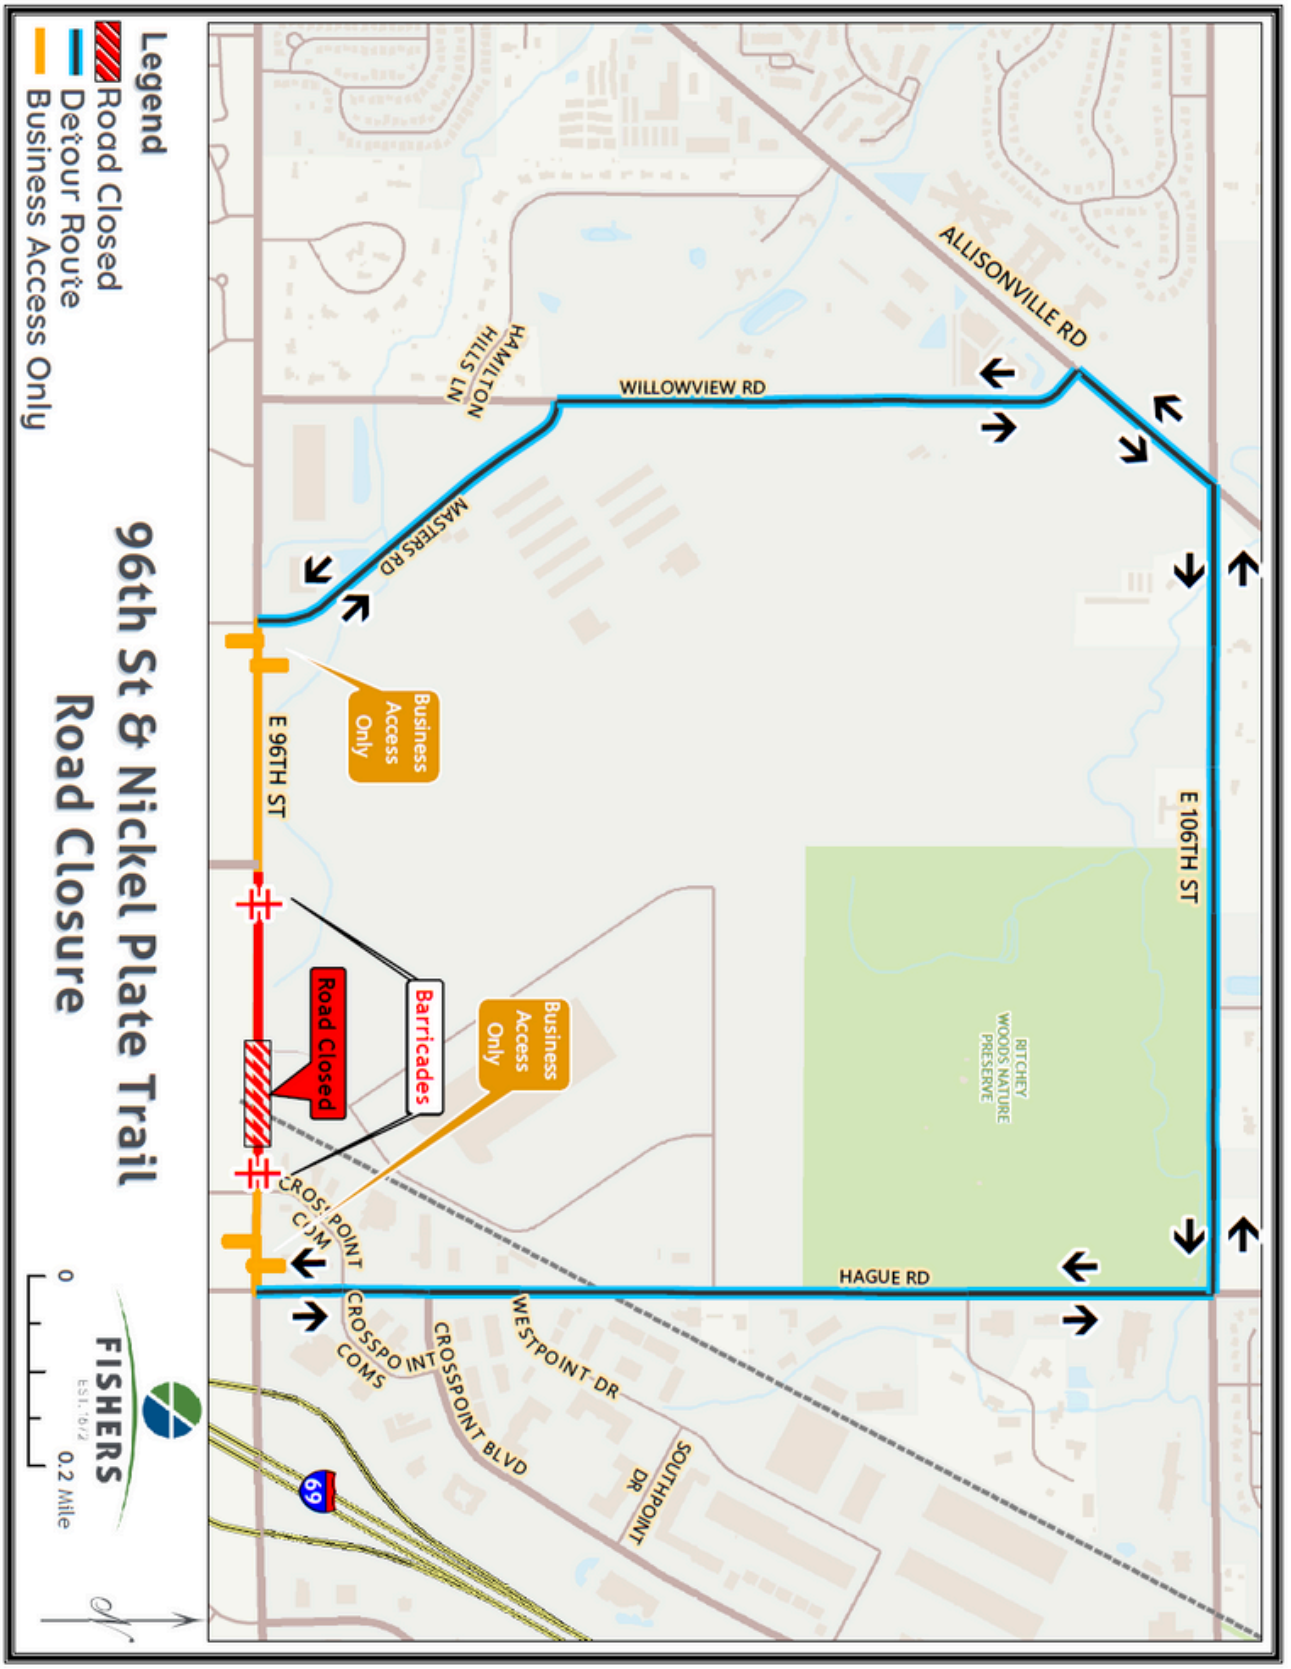

FOR MORE INFO VISIT: FISHERS.IN.GOV/DRIVEFISHERS

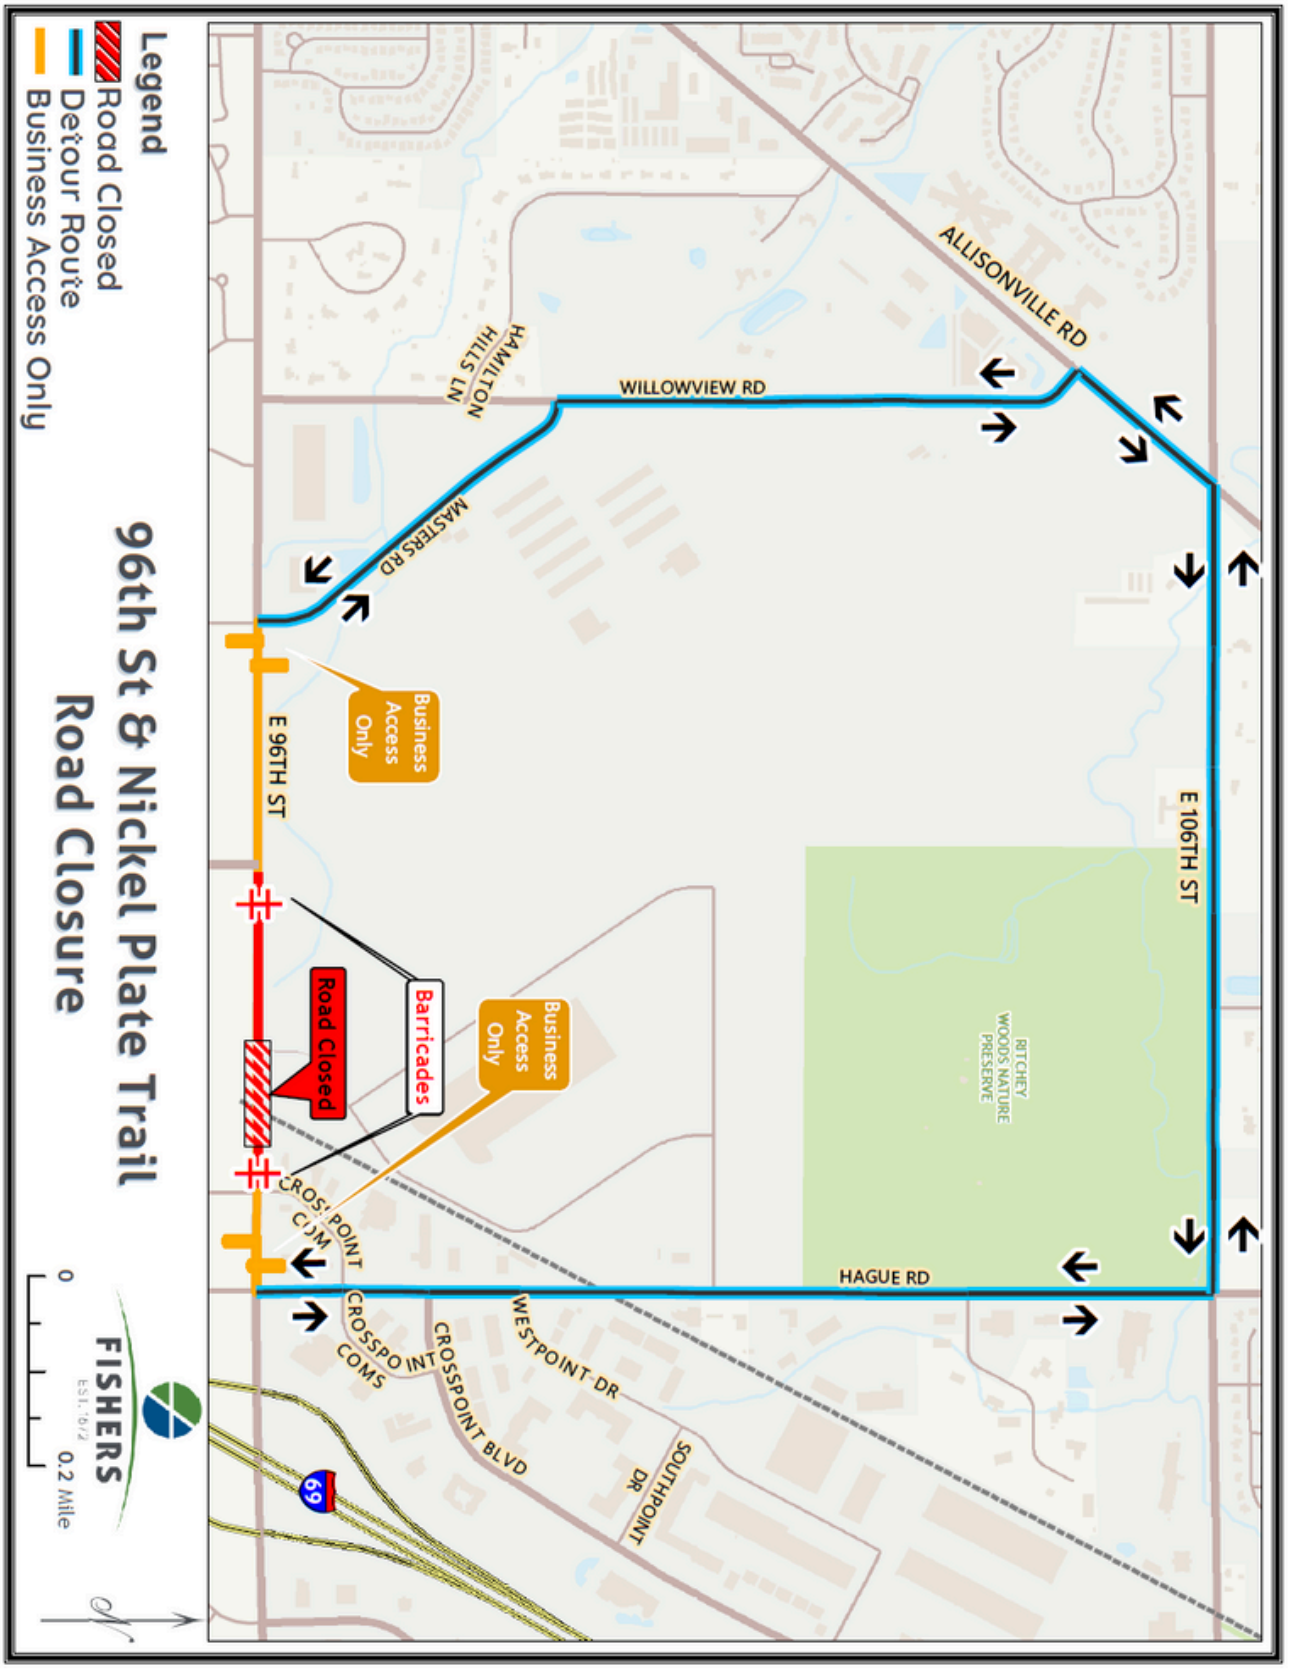

FOR MORE INFO VISIT: FISHERS.IN.GOV/DRIVEFISHERS